



Cut your batting squares to 2" Smaller than your squares.

Optional not to use batting




Take one of the main fabric squares and backing squares. Place batting in between, like a sandwich. You can also use 505 spray to hold the layers together.

Next, go to your sewing machine and sew an X from corner to corner. This will quilt your square for you. Continue with this process for both your Main Fabric Squares and Secondary Squares.

Now you're ready to start laying our your rag quilt. Please see the graph on the next page.



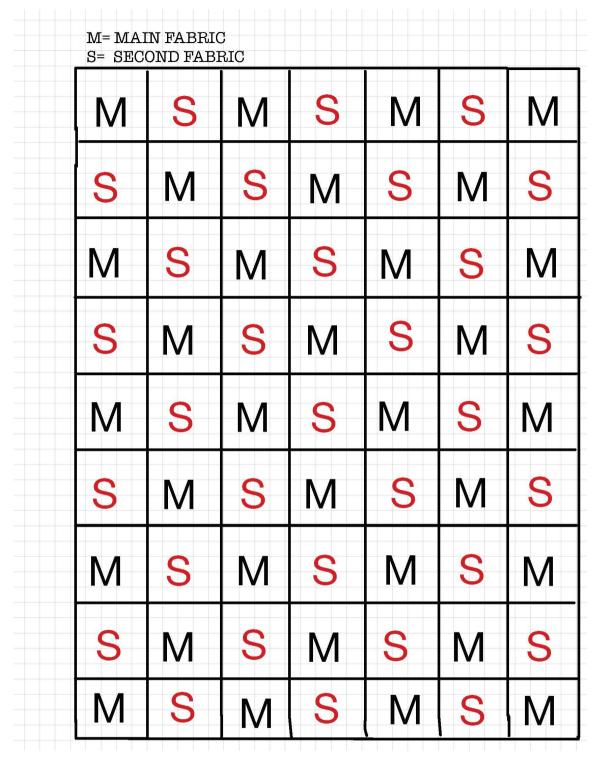



Let's sew the blocks together. You will want to make sure that you put the squares together, wrong sides facing each other. Therefore, you should have both backings facing each other and you should have a main fabric and a secondary fabric piece for your front.

Once you have your backings facing each other, using a 1" seam allowance, sew your blocks together. You will repeat this process until you have each row completed.

Attaching the rows is done the same way. You will want to make sure you have wrong sides facing each other and then sew a 1" seam allowance to

attach.



I highly suggest pinning the rows together before sewing. This will help to keep the layers from shifting while sewing.

Once you have the quilt finished, go around the edge of the quilt and measure in 1" from the edge. Sew a straight stitch all the way around. This will keep your quilt from unraveling when you go to fringe the edge of your quilt.

I recommend using Spring Loaded Scissors for cutting the fringe, however, you can use scissors. Go all over you quilt and fringe each block and row. Don't forget to fringe the edge as well.



You are now ready to begin the ragging process. Put your finished quilt in your washer and wash with laundry detergent & a color catcher in cold water. When it's finished washing put in the dryer and dry on medium to high heat until dry. The more you wash your rag quilt, the more it will rag!

Congratulations! ♥ Your rag quilt is done!

